

The power to exceed




NorthStar automotive batteries excel at providing both high reserve capacity and cranking amps, perfect for performance and start-stop technology applications.


- Pure lead AGM technology delivers exceptional CCA ratings and reserve capacity cycling ability
- Quick starting every time
- Cycles over 900 times to 50% depth of discharge
- Faster recharge than conventional batteries
- Proudly made in the USA at our state-of-the-art battery plant
- OEM fit is ensured - built to exact BCI standards
- Housed in advanced plastics for durability performance and heat resistance
- Advanced AGM construction means no water levels to check or terminals to clean
- Approved as non-hazardous cargo for ground sea and air transport DOT 49CFR173.159(d), (i) and (ii)

# NSB-AGM 65


## Nominal Technical Specifications

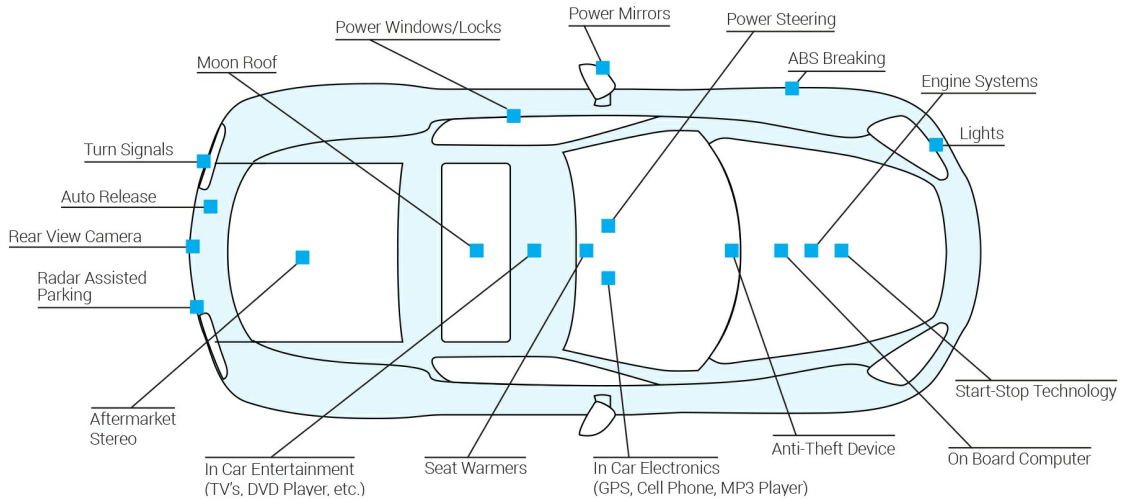

### Technical data

|                                    |   |
|------------------------------------|---|
| Terminal configuration             | SAE   |
| Terminal illustration              |  |
| Pulse cranking amps                | 1750 A  |
| CCA rating at -18°C (0°F)          | 930 A   |
| CA/MCA rating at 0°C (32°F)        | 1070 A  |
| Reserve capacity                   | 135 min   |
| Capacity - 20 hour rate (1.75 vpc) | 69 Ah   |
| Internal resistance                | 3.3 mΩ @ 25°C (77°F)  |
| Short circuit current              | 5000 A  |
| Warranty                           | 4 years full  |
| Quantity per layer                 | 20  |
| Quantity per pallet                | 40  |

### Technical Drawing

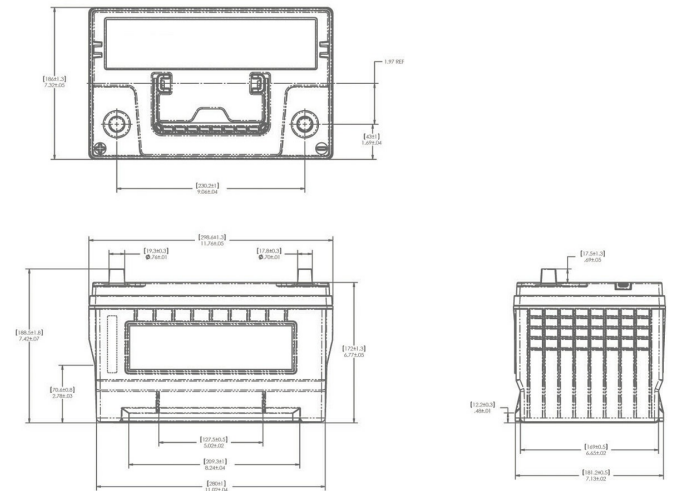

All NorthStar batteries are compliant with Battery Council International standards, UL approved and UN2800 certified. NorthStar is registered to ISO 9001 and ISO 14001.