


## Product Image



## Product Dimensions

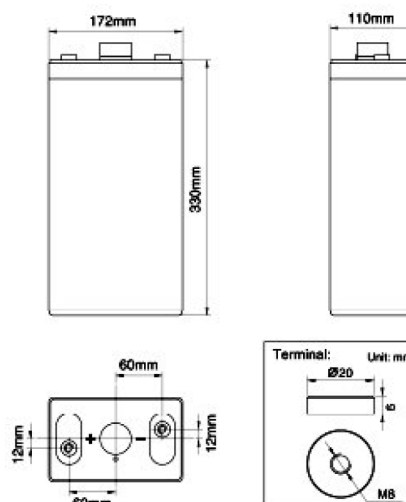

## Characteristics

Nominal Voltage		2V
Nominal Capacity (10 hour rate)		200Ah
Capacity 25°C (77°F)	20 hour rate (10.6A)	212Ah
	5 hour rate (35.4A)	177Ah
	1 hour rate (110A)	110Ah
Internal Resistance	Full Charged Battery 25°C	≤0.47mΩ
Capacity affected by Temperature (10 hour )	40°C (104°F)	102%
	25°C (77°F)	100%
	0°C (32°F)	85%
	-15°C (5°F)	65%
Self-Discharge 25°C (77°F) Capacity	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge (Constant Voltage) 25°C (77°F)	Float	Initial Charging Current Less than 30A Voltage 2.23-2.27V
	Cycle	Initial Charging Current Less than 30A Voltage 2.33-2.37V

## Packaging

Battery Dimensions	Length	173mm
	Width	111mm
	Height	329mm
	Total Height	365mm
Box Dimensions	Length	186mm
	Width	124mm
	Height	424mm
Quantity Per Box		1 PC per box
Net weight Per Cell		13.3kg±3%
Net weight Per Box		13.3kg
Gross Weight		13.8kg

### Discharge Constant Current per Cell (Amperes at 77°F/25°C)







F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	559	361	299	198	147	121	77	55	37	25	22.0	11.7
1.65V	549	354	294	194	145	119	76	54	37	24	21.6	11.4
1.70V	538	348	288	191	142	117	74	53	36	24	21.2	11.2
1.75V	528	341	283	187	139	114	73	52	35	23	20.8	11.0
1.80V	508	328	272	180	134	110	70	50	34	22	20.0	10.6

### Discharge Constant Power per Cell (Watts at 77°F 25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	1076	695	576	381	284	233	148	106	72	47	42.4	22.4
1.65V	1056	682	565	374	279	229	146	104	71	47	41.6	22.0
1.70V	1037	669	555	367	273	224	143	102	69	46	40.8	21.6
1.75V	1017	657	545	360	268	220	140	100	68	45	40.0	21.2
1.80V	978	631	524	347	258	212	135	96	65	43	38.5	20.4

**Note** The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice.

## Performance Characteristics

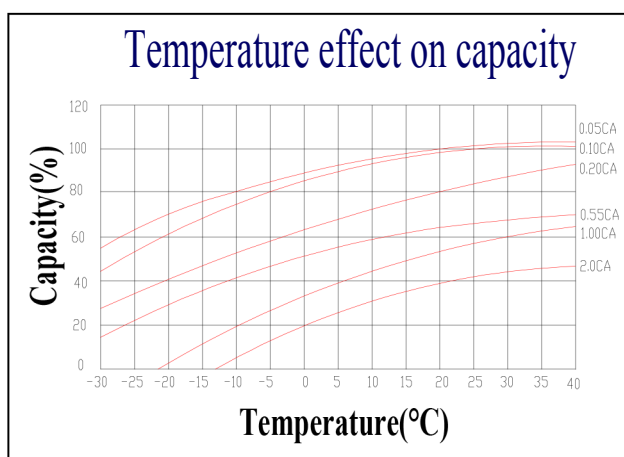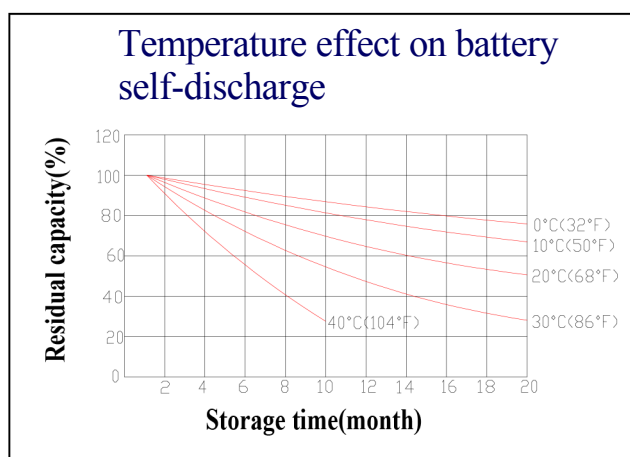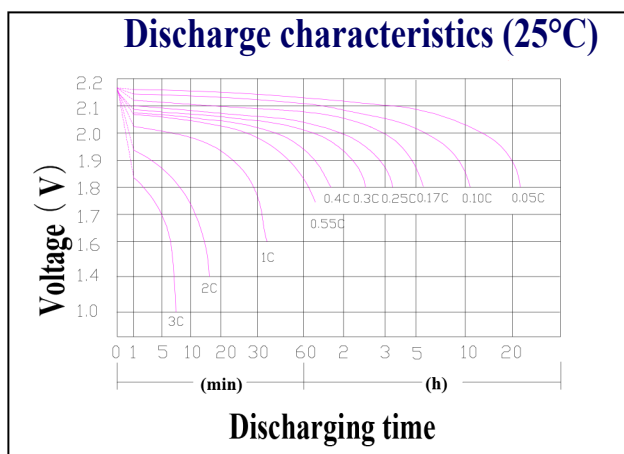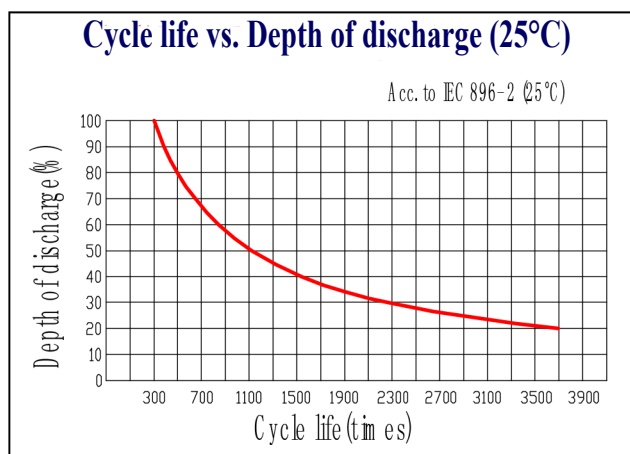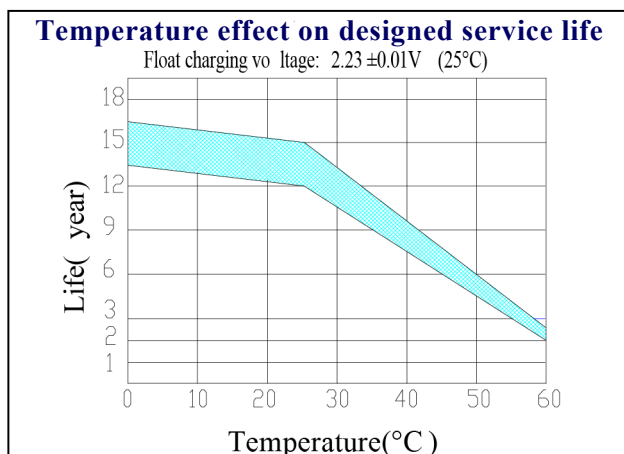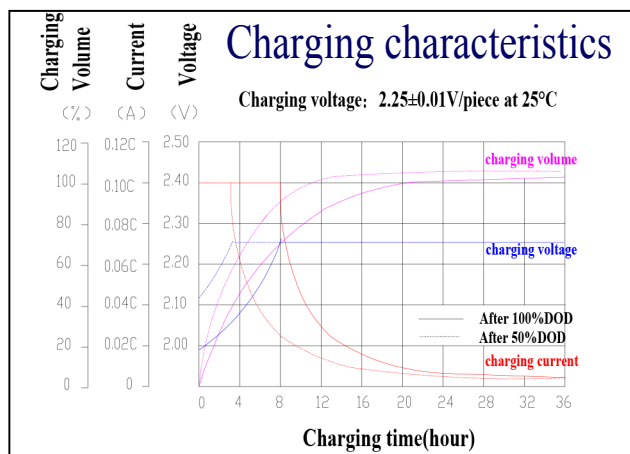

## Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Si-Rubber	Copper	Fiberglass	Sulfuric acid

For sales & service, please contact Battery Service Hub Ltd  
Tel | +44 (0)1858 433008 Email | [info@batteryservicehub.com](mailto:info@batteryservicehub.com)