



Yuasa Technical Data Sheet

Yuasa YBX3030 - YBX3000 SMF Batteries

Performance

| | |
|--------------------------|------|
| Voltage | 12V |
| Capacity (20-hour) | 72Ah |
| Cold Cranking Amps (EN1) | 630A |

Dimensions

| | |
|--------|-------|
| Length | 260mm |
| Width | 174mm |
| Height | 225mm |

Weights & Measures

| | |
|-----------------------|--------|
| Mean Weight with Acid | 18.4kg |
|-----------------------|--------|



Container Features

| | |
|---------------------------|----------------|
| Case Type | JIS D26 |
| Hold Down | N |
| State of Charge Indicator | ✓ |
| Handles | ✓ |
| End Venting | ✓ |
| Lid Type | SMF Double Lid |


Technology

| | |
|---------------------------|-------------|
| Flame Arrestor Technology | ✓ |
| Separator | Ca/Ca PE |
| VDA Roll Over Test | ✓ |
| Recommended Charge Rate | 4A |
| Performance Marking | W3-C2-V2-E1 |


Terminal Type

T1

Standard DIN Post

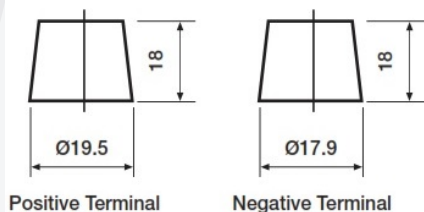

Cell Assembly Layout

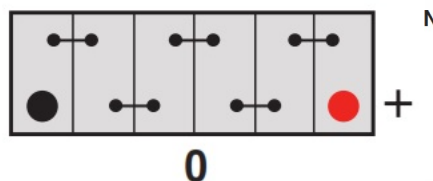

Battery Hold-down



Data Sheet generated on 26/02/2020 - E&OE