



## Yuasa Technical Data Sheet

### Yuasa YBX5069 - YBX5000 Silver High Performance SMF Batteries

#### Performance

|                          |      |
|--------------------------|------|
| Voltage                  | 12V  |
| Capacity (20-hour)       | 75Ah |
| Cold Cranking Amps (EN1) | 650A |

#### Dimensions

|        |       |
|--------|-------|
| Length | 269mm |
| Width  | 174mm |
| Height | 225mm |

#### Weights & Measures

|                       |        |
|-----------------------|--------|
| Mean Weight with Acid | 18.1kg |
|-----------------------|--------|



#### Container Features

|                           |                |
|---------------------------|----------------|
| Case Type                 | JIS D26 + B9   |
| Cell Layout               | 1              |
| Hold Down                 | B5             |
| State of Charge Indicator | ✓              |
| Handles                   | ✓              |
| End Venting               | ✓              |
| Lid Type                  | SMF Double Lid |

#### Technology

|                         |             |
|-------------------------|-------------|
| Flame Arrestor          | ✓           |
| Technology              | Ca/Ca       |
| Separator               | PE          |
| VDA Roll Over Test      | ✓           |
| Recommended Charge Rate | 4A          |
| Performance Marking     | W4-C2-V3-E1 |


#### Terminal Type

#### Cell Assembly Layout


#### Battery Hold-down

##### T1


Standard DIN Post




Positive Terminal



Negative Terminal

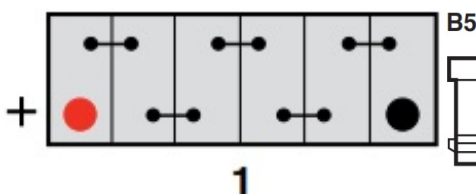

B5



Data Sheet generated on 05/05/2020 - E&OE