



Yuasa Technical Data Sheet

Yuasa 628HD - Cargo Heavy Duty Batteries (HD)

Performance

| | |
|--------------------------|-------|
| Voltage | 12V |
| Capacity (20-hour) | 143Ah |
| Cold Cranking Amps (EN1) | 900A |

Dimensions

| | |
|--------|-------|
| Length | 513mm |
| Width | 189mm |
| Height | 223mm |



Weights & Measures

| | |
|-----------------------|------------|
| Mean Weight with Acid | 39kg |
| Dry Weight | - |
| Acid Volume | 8.4 litres |

Container Features

| | |
|---------------------------|-------------|
| Case Type | DIN A |
| Cell Layout | 4 |
| Hold Down | N |
| State of Charge Indicator | - |
| Handles | ✓ |
| End Venting | - |
| Semi-Traction Features | - |
| Lid Type | Raised Plug |

Technology

| | |
|-------------------------|------------------|
| Flame Arrestor | ✓ |
| Technology | Sb/Ca |
| Separator | PE |
| VDA Roll Over Test | - |
| Vibration | V2 (30Hz/6g/2hr) |
| Recommended Charge Rate | 8A |


Terminal Type

T1

Standard DIN Post



Cell Assembly Layout

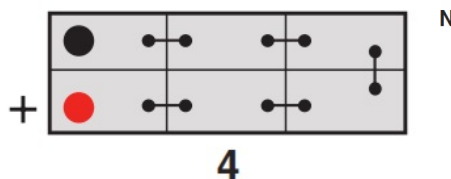

Battery Hold-down



Data Sheet generated on 18/07/2017 - E&OE